


● **CU 40/C TYPE**



Protection rate: **IP40**
 Insulation class: **B (130°C)**
 Reference cycle: **3 minutes**
 Standard stroke (s): **15 mm**
 Temperature rise "ΔV₃₁": **70°C**
 Working temperature: **-10 to 45°C**
 Work: **Push / Pull**

Release spring will be incorporated by defect
 Standard spring force:
 F_s(s=0mm) = 3.2N
 F_s(s=15mm) = 1.7N

(ED) Duty-cycle ED(%)	100	40	25	15	5
(P20) Power at 20°C (W)	13	30	48	82	247
(Fm) Solenoid force (N) 1)	7.8	13.5	17	23	41
Max time under voltage(s)	Inf	72	45	27	9
Opening time (ms) 2)	125	98	92	86	82
Release time (ms) 3)	75	60	57	54	51
Plunger weight (Kg)	0.085				
Solenoid weight (Kg)	0.665				

1) Fm Solenoid force is given according to VDE0580 without deducting the spring force or the plunger weight if vertical mounting.

2) Time is given on these conditions: Coil supplied under nominal voltage ; Stabilized in it's working temperature ; Load 70% of the solenoid force ; Horizontal assembly ; Standard stroke initial position; 20°C ambient temperature.

3) Time is given on these conditions: Standard spring ; without load on shaft ; Horizontal assembly ; Standard stroke initial position.

Duty-cycle ED%	Standard voltages								Under demand				
	VDC								VDC		VAC		
	6	12	24	48	100	125	205	110	230	Min	Max	Min	Max
100	o	o	o	o	o	o	o	o	x	6	250	48	125
40	x	o	o	o	o	o	o	o	x	9	250	48	125
25	x	o	o	o	o	o	o	x	x	12	250	x	x
15	x	o	o	o	o	o	o	x	x	24	250	x	x
5	x	x	o	o	o	o	o	x	x	24	250	x	x

Layout: o = Available ; x = Unavailable

- Voltage under demand:
 They can be manufactured at voltages between the maximum and minimum voltage values shown in the chart.

- To feed in alternating current the solenoid will have an external rectifier.

- The duty cycles described in the chart are standard, they can be manufactured in any intermediate value.


- If any customization from the original is needed, please ask us.

- Earthing is recommended if the metallic parts are accessible.


Ordering code: CU40/C --V ED---% - Spring
 Voltage: 24Vdc; Duty cycle: ED100%; With spring:
 CU40/C 24Vdc ED100% RS
 Voltage: 12Vdc; Duty cycle: ED15%; Without spring:
 CU40/C 12Vdc ED15% RN

Spring yes: **RS** ; Spring no: **RN**

Solenoid under voltage (s=0mm position)

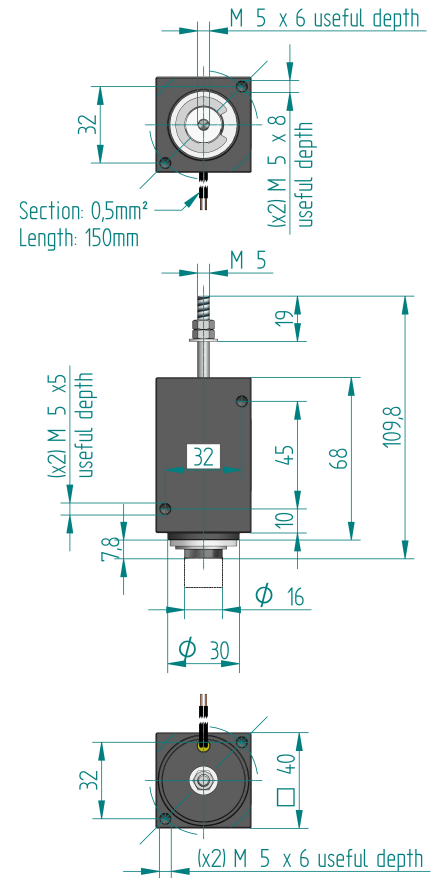

Force-stroke curve

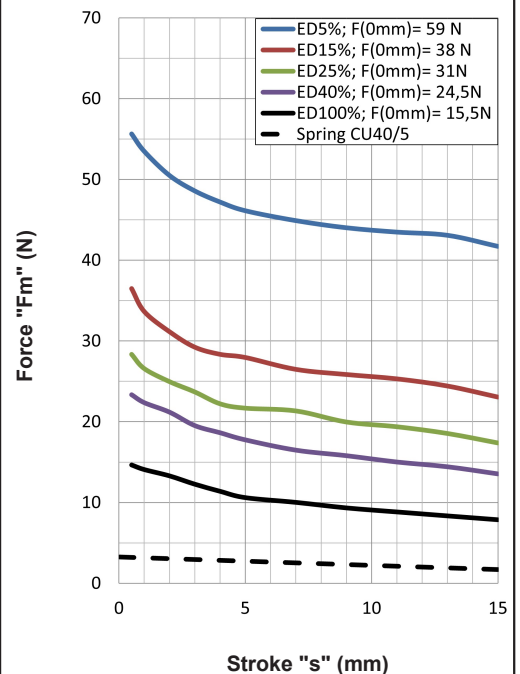

Calculation of the effective force:
 see pages 1 and 52

For fixation and mounting positions: see page 52